

Cooling Systems for Rolling Stock



Cooling tower for combined cooler for transformator oil and coolant



DE DIESEL-ELECTRIC-LOCOMOTIVES

AKG cooling towers installed in diesel and hybrid locomotives.



ELECTRIC-LOCOMOTIVES

AKG cooling towers in all sizes.




• Tailor-made cooling systems for transformers and converters with fluid pumps, speed controlled fans, tanks and pipe work.



DMU DIESEL-MULTIPLE-UNITS

AKG high performance light weight cooling systems.

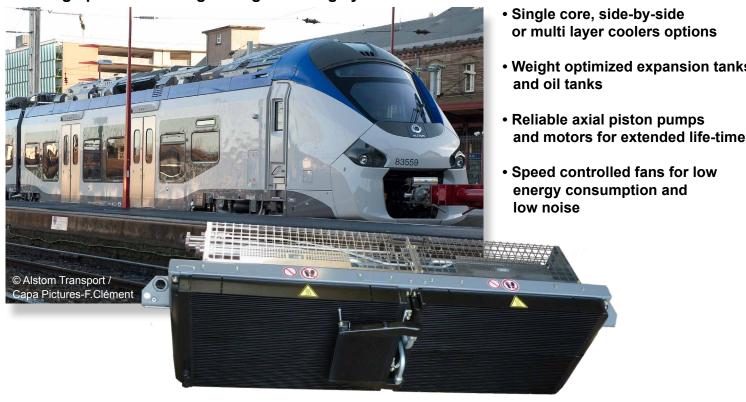

EMU ELECTRICAL-MULTIPLE-UNITS

AKG roof cooling units for transformers and converters.





LRV LIGHT-RAIL-VEHICLE

AKG converter and traction motor cooling.



HST HIGH-SPEED-TRAINS

AKG cooling units for transformers and converters.




MODULARISATION OF RAILWAY-TRANSFORMER OIL COOLING UNITS



STANDARD TRANSFORMER OIL COOLING -

Transformer oil cooling for rolling stock is a major competence of AKG.

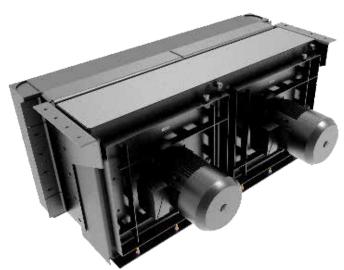

With our modularisation we can offer you components for

- Underfloor
- Onboard
- · Roof cooling units

which fulfill the actual technical and normative railway requirements (EN 15085, EN 45545).

Numerous advantages include:

- Pre-engineered components
- Fast customizing
- Proven and tested technology
- Flexibility to combine various options
- Quick availability and delivery

The flexibility is achieved through:



TECHNICAL DATA (50 Hz, 2 POLE)

U-flow: Inlet and outlet connection on the same side

Model	Power range ^(c)	ETD	Total size ^(#) incl. header tanks (in mm)	Fan diameter	Rated power of electric motor ^(*)	Pressure drop oil side ^(c)
RT.u1	up to 88 kW	60 K	1.040 x 580 x 750	315 mm	2· 2,0 kW	410 mbar
RT.u2	up to 126 kW	60 K	1.200 x 600 x 820	355 mm	2· 2,8 kW	425 mbar
RT.u3	up to 174 kW	60 K	1.350 x 650 x 850	400 mm	2· 4,4 kW	480 mbar

I-flow: Inlet and outlet connection on different sides

Model	Power range ^(c)	ETD	Total size ^(#) incl. header tanks (in mm)	Fan diameter	Rated power of electric motor ^(*)	Pressure drop oil side ^(c)
RT.i1	up to 88 kW	60 K	1.040 x 580 x 750	315 mm	2· 2,0 kW	200 mbar
RT.i2	up to 128 kW	60 K	1.200 x 600 x 820	355 mm	2· 2,8 kW	205 mbar
RT.i3	up to 177 kW	60 K	1.350 x 650 x 850	400 mm	2· 4,4 kW	230 mbar

The design focuses on equivalent power at different connection positions. The same level of performance was achieved by selecting different components.

All configurations are Twinboxes with two fans. Power range and pressure drop on oil side are examples for following conditions: 200 km/h train speed / Fouling 10% / ETD 60 K: Oil inlet 105 °C; ambient temperature 45 °C / Oil flow: 35 m³/h resp. 583 L/Min / Ester Midel 7131 oil / Elevation 400 m a.s.l. / Fitting Øi 70 mm.

We will be happy to calculate deviating conditions for you. Please contact us by e-mail or phone.



CONTACTS FOR MANUFACTURERS

AKG Thermotechnik International
GmbH & Co. KG

Am Hohlen Weg 31 D-34369 Hofgeismar • Germany Phone + 49 5671 - 8 83 - 0

info@akg-group.com www.akg-group.com




F-57204 Sarreguemines • France Phone + 33 3 - 87 95 11 11



Mebane, NC 27302-0370 • USA Phone + 1 919 - 5 63 42 86 E-Mail info@akg-america.com



Coimbatore, Tamil Nadu - 642 109 • India Phone + 91 422 - 665 1100



215400 Taicang, Jiangsu Province • Peoples Republic of China
Phone + 86 512 - 53 56 94 18



35730 Kemalpaşa, Izmir • Turkey Phone +90 232 877 21 99 E-Mail info@akg-turkey.com

AKG Service Program

- >>Maintenance / Overhaul
- >>Supply of spare parts
- >>Repair
- >>Technical Support
- >>Commissioning
- >>Service at Customer Location
- >>Training

Technical Service

Phone: +49 5671 - 883 - 1118

E-mail: AKG-Service@akg-gruppe.de



Spare Parts Service Rolling Stock

Phone: +49 5671 - 883 - 1471

E-mail: AKG-Service@akg-gruppe.de